

UTILITY PATENT APPLICATION TRANSMITTAL
(Large Entity)

(Only for new nonprovisional applications under 37 CFR 1.53(b))

Docket No.
L9289.00106Total Pages in this Submission
4**TO THE ASSISTANT COMMISSIONER FOR PATENTS**Box Patent Application
Washington, D.C. 20231

Transmitted herewith for filing under 35 U.S.C. 111(a) and 37 C.F.R. 1.53(b) is a new utility patent application for an invention entitled:

**APPARATUS AND METHOD FOR TDMA-TDD
BASED TRANSMISSION/RECEPTION**

and invented by:

Takashi KITADEIf a **CONTINUATION APPLICATION**, check appropriate box and supply the requisite information:☐ Continuation ☐ Divisional ☐ Continuation-in-part (CIP) of prior application No.: _____

Which is a:

☐ Continuation ☐ Divisional ☐ Continuation-in-part (CIP) of prior application No.: _____

Which is a:

☐ Continuation ☐ Divisional ☐ Continuation-in-part (CIP) of prior application No.: _____

Enclosed are:

Application Elements

1. ☒ Filing fee as calculated and transmitted as described below
2. ☒ Specification having 39 pages and including the following:
 - a. ☒ Descriptive Title of the Invention
 - b. ☐ Cross References to Related Applications (if applicable)
 - c. ☐ Statement Regarding Federally-sponsored Research/Development (if applicable)
 - d. ☐ Reference to Microfiche Appendix (if applicable)
 - e. ☒ Background of the Invention
 - f. ☒ Brief Summary of the Invention
 - g. ☒ Brief Description of the Drawings (if drawings filed)
 - h. ☒ Detailed Description
 - i. ☒ Claim(s) as Classified Below
 - j. ☒ Abstract of the Disclosure

UTILITY PATENT APPLICATION TRANSMITTAL (Large Entity)

(Only for new nonprovisional applications under 37 CFR 1.53(b))

Docket No.
L9289.00106

Total Pages in this Submission
4

Application Elements (Continued)

3. ☒ Drawing(s) (when necessary as prescribed by 35 USC 113)
- a. ☒ Formal Number of Sheets 7
- b. ☐ Informal Number of Sheets _____
4. ☒ Oath or Declaration
- a. ☒ Newly executed (original or copy) ☐ Unexecuted
- b. ☐ Copy from a prior application (37 CFR 1.63(d)) (for continuation/divisional application only)
- c. ☒ With Power of Attorney ☐ Without Power of Attorney
- d. ☐ DELETION OF INVENTOR(S)
Signed statement attached deleting inventor(s) named in the prior application,
see 37 C.F.R. 1.63(d)(2) and 1.33(b).
5. ☐ Incorporation By Reference (usable if Box 4b is checked)
The entire disclosure of the prior application, from which a copy of the oath or declaration is supplied under Box 4b, is considered as being part of the disclosure of the accompanying application and is hereby incorporated by reference therein.
6. ☐ Computer Program in Microfiche (Appendix)
7. ☐ Nucleotide and/or Amino Acid Sequence Submission (if applicable, all must be included)
- a. ☐ Paper Copy
- b. ☐ Computer Readable Copy (identical to computer copy)
- c. ☐ Statement Verifying Identical Paper and Computer Readable Copy

Accompanying Application Parts

8. ☒ Assignment Papers (cover sheet & document(s))
9. ☐ 37 CFR 3.73(B) Statement (when there is an assignee)
10. ☐ English Translation Document (if applicable)
11. ☒ Information Disclosure Statement/PTO-1449 ☒ Copies of IDS Citations
12. ☐ Preliminary Amendment
13. ☒ Acknowledgment postcard
14. ☐ Certificate of Mailing
- ☐ First Class ☐ Express Mail (Specify Label No.): _____

UTILITY PATENT APPLICATION TRANSMITTAL
(Large Entity)

(Only for new nonprovisional applications under 37 CFR 1.53(b))

Docket No.
L9289.00106

Total Pages in this Submission
4

Accompanying Application Parts (Continued)

15. ☒ Certified Copy of Priority Document(s) *(if foreign priority is claimed)*
16. ☐ Additional Enclosures *(please identify below):*

Request That Application Not Be Published Pursuant To 35 U.S.C. 122(b)(2)

17. ☐ Pursuant to 35 U.S.C. 122(b)(2), Applicant hereby requests that this patent application not be published pursuant to 35 U.S.C. 122(b)(1). Applicant hereby certifies that the invention disclosed in this application has not and will not be the subject of an application filed in another country, or under a multilateral international agreement, that requires publication of applications 18 months after filing of the application.

Warning

An applicant who makes a request not to publish, but who subsequently files in a foreign country or under a multilateral international agreement specified in 35 U.S.C. 122(b)(2)(B)(i), must notify the Director of such filing not later than 45 days after the date of the filing of such foreign or international application. A failure of the applicant to provide such notice within the prescribed period shall result in the application being regarded as abandoned, unless it is shown to the satisfaction of the Director that the delay in submitting the notice was unintentional.

UTILITY PATENT APPLICATION TRANSMITTAL (Large Entity)

(Only for new nonprovisional applications under 37 CFR 1.53(b))

Docket No.
L9289.00106

Total Pages in this Submission
4


JC841 U.S. PTO
09/693839
10/23/00

Fee Calculation and Transmittal

CLAIMS AS FILED

For	#Filed	#Allowed	#Extra	Rate	Fee
Total Claims	7	- 20 =	0	x \$18.00	\$0.00
Indep. Claims	4	- 3 =	1	x \$80.00	\$80.00
Multiple Dependent Claims (check if applicable) <input type="checkbox"/>					\$0.00
BASIC FEE					\$710.00
OTHER FEE (specify purpose)					\$0.00
TOTAL FILING FEE					\$790.00

- ☒ A check in the amount of \$790.00 to cover the filing fee is enclosed.
- ☒ The Commissioner is hereby authorized to charge and credit Deposit Account No. 19-4375 as described below. A duplicate copy of this sheet is enclosed.
- ☐ Charge the amount of as filing fee.
- ☒ Credit any overpayment.
- ☒ Charge any additional filing fees required under 37 C.F.R. 1.16 and 1.17.
- ☐ Charge the issue fee set in 37 C.F.R. 1.18 at the mailing of the Notice of Allowance, pursuant to 37 C.F.R. 1.311(b).


Signature

James E. Ledbetter, Reg. No. 28,732
Stevens, Davis, Miller & Mosher, LLP
1615 L Street N.W., Suite 850
P.O. Box 34387
Washington, D.C. 20043-4387
Telephone: 202/408-5100
Facsimile: 202/408-5200

Dated: October 23, 2000

CC:

SPECIFICATION

Title of the Invention :

**APPARATUS AND METHOD FOR
TDMA-TDD BASED TRANSMISSION/RECEPTION**

Inventor(s) :

Takashi KITADE

APPARATUS AND METHOD FOR TDMA-TDD BASED
TRANSMISSION/RECEPTION

BACKGROUND OF THE INVENTION

5

Field of the Invention

The present invention relates to a
transmission/reception apparatus and
transmission/reception method that carries out handover
10 in a communication system according to a TDMA (Time
Division Multiple Access)-TDD (Time Division Duplex)
system, and more particularly, to a
transmission/reception apparatus and
transmission/reception method that carries out handover
15 in a communication system in which a plurality of user
signals are multiplexed on time slots according to a CDMA
(Code Division Multiple Access) system or OFDM
(Orthogonal Frequency Division Multiplexing) system,
etc.

20

Description of the Related Art

As multiple access technologies for radio
communications such as car phones and cellular phones,
a TDMA system, CDMA system and OFDM system, etc. are used.
25 The TDMA system is a system in which users communicate
with each other by dividing a time. The CDMA system is
a system in which a plurality of users share a same
frequency or same time and communicate with each other

by separating each user's signal using an orthogonal spreading code.

Furthermore, as a system of multiplexing downlink (channel through which a base station transmits a signal to a mobile station) and uplink (a channel through which a mobile station transmits a signal to a base station), a TDD system and FDD (Frequency Division Duplex) system are available. The TDD system is a system of multiplexing the downlink and uplink in a same frequency band. The FDD system is a system of multiplexing the downlink and uplink in different frequencies on a same time.

In the TDD system in particular, a same frequency is assigned to transmission and reception, that is, a same frequency is assigned to the downlink and uplink, and therefore a frequency correlation of fading fluctuations between a transmission signal and reception signal in a base station and mobile station is 1.

Furthermore, in the case where the cycle of switching between the uplink and downlink is sufficiently short, a time correlation between the downlink and uplink of the propagation condition such as fading fluctuations increases.

In a cellular system, handover is generally carried out. According to FIG.1, when mobile station 11 moves, for example, from the area of base station (A) 12 to the area of base station (B) 13, handover is a technology for switching the traffic channel handled by base

station (A) 12 to the base station (B) 13. There are two kinds of method for carrying out handover; soft handover and hard handover.

Soft handover is mainly applied to a CDMA system and is a method for switching traffic channels as described below. That is, when handover takes place, the traffic channel handled by base station (A) 12 and the traffic channel handled by base station (B) 13 are simultaneously maintained for mobile station 11 and then the traffic channel used by mobile station 11 is changed to the traffic channel handled by base station (B) 13 only. This soft handover can reduce a possibility that the traffic channel will be down during handover.

On the other hand, hard handover is mainly applied to a TDMA system or a communication using packet transmission and is a method for switching traffic channels as described below. That is, hard handover is a method that does not allow mobile station 11 to use the traffic channel handled by base station (A) 12 and the traffic channel handled by base station (B) 13 simultaneously, and changes from the traffic channel handled by base station (A) 12 to the traffic channel handled by base station (B) 13 at certain timing.

The operations of the base station and mobile station when these two kinds of handover are used in a TDMA-TDD based communication will be explained with reference to FIG.2 and FIG.3. Here, a case where a CDMA system is used as the method of multiplexing signals of

a plurality of users in each time slot will be explained. As shown in FIG.1, suppose mobile station 11 moves from the area of base station (A) 12 to the area of base station (B) 13.

5 First, the case where soft handover is used will be explained with reference to FIG.2. FIG.2A to FIG.2E are schematic diagrams showing an example of state transition of time slot assignment in execution of soft handover in a conventional TDMA-TDD based communication.

10 As shown in FIG.2A, before handover takes place, a downlink traffic channel used for transmission from base station (A) 12 to each mobile station (including mobile station 11) is assigned to time slot (hereinafter referred to as "TS") 21 in a frame and an uplink traffic
15 channel used for transmission from the above mobile station to base station (A) 12 is assigned to TS22 in the frame.

When handover starts, as shown in FIG.2B, a downlink traffic channel used for transmission from base station
20 (B) 13 to mobile station 11 is assigned to TS23 in the frame. At this time, mobile station 11 combines the signal received over the downlink from base station (A) 12 and the signal received over the downlink from base station (B) 13.

25 Then, as shown in FIG.2C, an uplink traffic channel used for transmission from mobile station 11 to base station (B) 13 is assigned to TS24 in the frame. At this TS24, mobile station 11 transmits a signal to base

station (B) 13 and base station (B) 13 receives the signal from mobile station 11.

When mobile station 11 enters the area of base station (B) 13 completely, as shown in FIG.2D, mobile station 11 stops transmission to base station (A) 12, which was carried out at TS22. Then, as shown in FIG.2E, base station (A) 12 stops transmission to mobile station 11, which was carried out at TS21. In this way, handover is completed.

Then, a case where hard handover is used will be explained with reference to FIG.3. FIG.3A and FIG.3B are schematic diagrams showing an example of state transition of time slot assignment in execution of hard handover in the conventional TDMA-TDD based communication.

As shown in FIG.3A, before handover takes place, the state of assignment of time slots in the frame is the same as that in the case of soft handover described above (FIG.2A).

Then, triggered at certain timing while mobile station 11 is moving from the area of base station (A) 12 to the area of base station (B) 13, the state of time slots in the frame is changed from the state shown in FIG.3A to the state shown in FIG.3B.

That is, base station (A) 12 stops transmission to mobile station 11, which was carried out at TS31 and base station (B) 13 starts transmission to mobile station 11 at TS33. Moreover, mobile station 11 stops transmission

to base station (A) 12, which was carried out at TS32 and starts transmission to base station (B) 13 at TS34. In this way, handover is completed.

However, the conventional TDMA-TDD based
5 communication using handover has the following problems:
First, when soft handover is used, each mobile station
uses traffic channels handled by a plurality of base
stations (a plurality of parties on the other end of
communication) simultaneously during handover, and this
10 means that transmission is carried out at time slots
corresponding in number with the base stations above for
each frame.

Because of this, current consumption at each mobile
station increases and at the same time interference by
15 a transmission signal of each mobile station with base
stations other than the base stations above (base
stations that are not communication targets) using the
same time slots as those described above increases. To
suppress influences of this interference, it is
20 necessary to reduce the number of mobile stations to be
multiplexed on the time slots above. This results in a
reduction of the system capacity.

On the other hand, when hard handover is used,
unlike the case where soft handover is used, each mobile
25 station performs transmission using only a traffic
channel handled by one base station all the time, and
therefore it is possible to equalize current consumption
at each mobile station and interference with the other

base stations above to current consumption and interference for any time (during a normal communication) other than a handover period.

However, in the case where a mobile station is near areas of a plurality of base stations, or more specifically, the mobile station is on the boundary between the area of base station (A) 12 and the area of base station (B) 13 in FIG.1, the level of the reception signal from base station (A) 12 and the level of the reception signal from base station (B) 13 may be balanced and the level of the reception signal may be small. In such a case, switching of hard handover often takes place, which increases the possibility that calls made by the mobile station will be down.

SUMMARY OF THE INVENTION

It is an object of the present invention to provide a TDMA-TDD based transmission/reception apparatus capable of suppressing current consumption and interference with base stations other than communication targets and executing handover without causing interruption of calls. This object is attained by selecting the base station to be the transmission destination from among a plurality of base stations in the process of handover based on the propagation conditions for the plurality of base stations and transmitting a signal only to the selected base station.

BRIEF DESCRIPTION OF THE DRAWINGS

The above and other objects and features of the invention will appear more fully hereinafter from a consideration of the following description taken in connection with the accompanying drawing wherein one example is illustrated by way of example, in which;

FIG.1 is a schematic diagram showing a radio communication carried out by a mobile station equipped with a conventional transmission/reception apparatus;

FIG.2A is a schematic diagram showing an example of state transition of time slot assignment in execution of soft handover in a conventional TDMA-TDD based communication;

FIG.2B is a schematic diagrams showing an example of state transition of time slot assignment in execution of soft handover in a conventional TDMA-TDD based communication;

FIG.2C is a schematic diagrams showing an example of state transition of time slot assignment in execution of soft handover in a conventional TDMA-TDD based communication;

FIG.2D is a schematic diagrams showing an example of state transition of time slot assignment in execution of soft handover in a conventional TDMA-TDD based communication;

FIG.2E is a schematic diagrams showing an example of state transition of time slot assignment in execution

of soft handover in a conventional TDMA-TDD based communication;

FIG.3A is a schematic diagram showing an example of state transition of time slot assignment in execution
5 of hard handover in the conventional TDMA-TDD based communication;

FIG.3B is a schematic diagram showing an example of state transition of time slot assignment in execution of hard handover in the conventional TDMA-TDD based
10 communication;

FIG.4 is a schematic diagram showing a radio communication carried out by a mobile station equipped with a transmission/reception apparatus according to Embodiment 1 of the present invention;

FIG.5 is a block diagram showing a configuration of the mobile station equipped with the
15 transmission/reception apparatus according to Embodiment 1 of the present invention;

FIG.6A is a schematic diagram showing an example
20 of the state of time slots assigned to the mobile station equipped with the transmission/reception apparatus according to Embodiment 1 of the present invention and a base station that carries out a radio communication with this mobile station;

FIG.6B is a schematic diagram showing an example
25 of the state of time slots assigned to the mobile station equipped with the transmission/reception apparatus according to Embodiment 1 of the present invention and

a base station that carries out a radio communication with this mobile station;

FIG.6C is a schematic diagram showing an example of the state of time slots assigned to the mobile station equipped with the transmission/reception apparatus according to Embodiment 1 of the present invention and a base station that carries out a radio communication with this mobile station;

FIG.6D is a schematic diagram showing an example of the state of time slots assigned to the mobile station equipped with the transmission/reception apparatus according to Embodiment 1 of the present invention and a base station that carries out a radio communication with this mobile station; and

FIG.7 is a block diagram showing a configuration of a mobile station equipped with a transmission/reception apparatus according to Embodiment 2 of the present invention.

DETAILED DESCRIPTION OF THE PREFERRED EMBODIMENTS

With reference now to the attached drawings, embodiments of the present invention will be explained in detail below.

(Embodiment 1)

First, an overview of the transmission/reception

apparatus according to this embodiment will be explained with reference to FIG.4 taking a case where this transmission/reception apparatus is mounted on a mobile station as an example. FIG.4 is a schematic diagram showing a radio communication carried out by a mobile station equipped with the transmission/reception apparatus according to Embodiment 1 of the present invention. FIG.4 shows how mobile station 101 equipped with the transmission/reception apparatus according to this embodiment moves from area 105 of base station (A) 102 to area 106 of base station (B) 103.

Each mobile station (mobile station 101 in FIG.4) and each base station (base station (A) 102 and base station (B) 103 in FIG.4) carry out a TDMA-TDD based radio communication. Each mobile station and each base station carry out a communication using dedicated traffic channels at predetermined time slots in a frame. Hereinafter, for brevity of explanation, a signal that the mobile station transmits to the base station using a dedicated traffic or a signal that the base station transmits to the mobile station using a dedicated traffic channel will be referred to as "dedicated traffic channel signal."

Aside from a communication using the dedicated traffic channel, each base station transmits various control signals for each frame using a common control channel. That is, each base station almost always transmits a common control channel signal to each mobile

station. Hereinafter, for brevity of explanation, a signal that the base station transmits to the mobile station using the common control channel will be referred to as "common control channel signal." In order to

5 establish synchronization with the base station, each mobile station receives a common control channel signal transmitted from each base station.

Each mobile station receives and stores the transmission level of a common control channel signal

10 transmitted almost always from each base station through a broadcast channel, for example, of the common control channels. Moreover, each mobile station calculates and compares a loss in propagation from each base station using the reception level and transmission level of

15 common control channel signals almost always transmitted from each base station and detects the base station whose propagation loss is a minimum. That is, mobile station

101 here calculates and compares a propagation loss from the reception level of common control channel signals

20 almost always transmitted from base station (A) 102 and the reception level of common control channel signals almost always transmitted from base station (B) 103 and detects which of the base stations above has a smaller propagation loss.

25 The common control channel signal at each base station is transmitted to each mobile station is always transmitted with constant power. For this reason, by using the reception level and transmission level of

common control channel signals from base station (A) 102 and base station (B) 103, mobile station 101 can estimate the propagation condition used when each base station transmitted a common control channel signal to mobile station 101.

As described above, since each mobile station and each base station perform a TDD-based radio communication, the propagation conditions used when base station (A) 102 and base station (B) 103 transmitted a common control channel signal to mobile station 101 have a high correlation with the conditions of propagation paths used when mobile station 101 transmits dedicated traffic channel signals to base station (A) 102 and base station (B) 103, respectively.

Therefore, mobile station 101 can estimate the propagation condition when an dedicated traffic channel signal is transmitted to each base station by detecting the reception level of a common control channel signal from each base station, calculating and comparing a propagation loss.

During handover, mobile station 101 only transmits an dedicated traffic channel signal to the base station (here, base station (B) 103) whose propagation loss detected from the reception level of the common control channel signal is smallest. This allows mobile station 101 to select the base station that can have an optimal propagation path as the transmission destination of the dedicated traffic channel signal, that is, the optimal

base station.

After this, base station (B) 103 that has received the dedicated traffic channel signal from mobile station 101 transmits an dedicated traffic channel signal to mobile station 101 using a predetermined time slot. Of the other base stations, the base station (here base station (A) 102) that was performing transmission to mobile station 101 via a downlink dedicated traffic channel stops transmission of the dedicated traffic channel signal to mobile station 101. This is an overview of the transmission/reception apparatus according to this embodiment.

Next, the mobile station equipped with the transmission/reception apparatus according to this embodiment described above will be explained with reference to FIG.5. FIG.5 is a block diagram showing a configuration of the mobile station equipped with the transmission/reception apparatus according to Embodiment 1 of the present invention.

According to FIG.5, a signal received via antenna 201 (reception signal) is converted from an RF signal to a baseband signal by RF section 202. This reception signal is mainly a signal of a common control channel signal of each base station multiplexed with an dedicated traffic channel signal of the base station in the process of handover on a same frequency band.

The baseband signal from RF section 202 is subjected to despreading processing by despreading section 203.

More specifically, the baseband signal above is subjected to despreading processing using a spreading code corresponding to each base station and thereby a common control channel signal of each base station is extracted. Here, the spreading code corresponding to each base station corresponds to a spreading code used for spreading processing before transmission of the common control channel signal on each base station side described above. This despreading processing is carried out for every frame, that is, carried out almost always. The extracted common control channel signal of each base station is sent to propagation loss measuring section 206.

The baseband signal above is subjected to despreading processing using a spreading code assigned to this mobile station and thereby the dedicated traffic channel signal corresponding to this mobile station transmitted from the base station in the process of handover is extracted. This despreading processing is carried out at a predetermined time slot in the frame. The predetermined time slot will be described later. The extracted dedicated traffic channel signal is transmitted to demodulation section 204.

In demodulation section 204, the extracted dedicated traffic channel signal is demodulated and data is obtained, which is configured on a frame-by-frame basis. However, in execution of handover, that is, when despreading processing is carried out in a plurality of

time slots by despreding section 203, in demodulation section 204, the dedicated traffic channels extracted in the above plurality of time slots are combined and data is obtained, which is configured on a frame-by-frame basis. Data configured on a frame-by-frame basis is decomposed and output by data decomposition section 205.

On the other hand, propagation loss measuring section 206 extracts and stores information on the transmission level of the common control channel signal of each base station from among common control channel signals of base stations sent from despreding section 203. Each base station can transmit the transmission level of a common control channel signal by means of this common control channel signal (e.g., broadcast channel signal). Moreover, after measuring the reception level of a common control channel signal of each base station, propagation loss measuring section 206 measures a propagation loss for each base station from the stored transmission level of the common control channel signal and measured reception level of this common control channel signal. The measurement result is sent to propagation loss comparator 207.

Propagation loss comparator 207 detects the base station with the least propagation loss from all base stations in the process of handover based on the measurement result above. The detection result is sent to transmission data control section 208.

Transmission data control section 208 generates a control signal indicating that an dedicated traffic channel signal will be transmitted to a predetermined base station. More specifically, in execution of

5 handover, transmission data control section 208 generates a control signal indicating that an dedicated traffic channel signal will be transmitted to the base station whose propagation loss is a minimum based on the detection result above by propagation loss comparator

10 207. In any time period other than a handover execution period (during a normal communication), transmission data control section 208 generates a control signal indicating that an dedicated traffic channel signal will be transmitted to the base station, which has been

15 considered to be the transmission destination of the dedicated traffic channel signal so far. The control signal generated is sent to data composition section 209 and spreading section 211.

Data composition section 209 composes data

20 configured frame by frame using transmission data based on the control signal from transmission data control section 208. In execution of handover, the timing (slot position) of the transmission data is controlled so that the dedicated traffic channel signal is transmitted to

25 the base station detected by propagation loss comparator 207. During a normal communication, the timing of the transmission data is controlled so that an dedicated traffic channel signal is transmitted to the base station,

which has been considered to be the transmission destination of dedicated traffic channel signals so far.

The data composed frame by frame by data composition section 209 is subjected to primary modulation according to a predetermined modulation system by modulation section 210. The primary-modulated data is sent to spreading section 211.

Spreading section 211 performs spreading processing on the primary-modulated data based on a control signal from transmission data control section 208. In execution of handover, a spreading code to be used for spreading processing is controlled so that an dedicated traffic channel signal is transmitted to the base station detected by propagation loss comparator 207. During a normal communication, a spreading code to be used for spreading processing is controlled so that an dedicated traffic channel signal is transmitted to the base station considered to be the transmission destination of the dedicated traffic channel signal so far.

The signal subjected to spreading processing by spreading section 211 is converted from a baseband signal to an RF signal by RF section 202. This RF signal is transmitted to the base station detected above via antenna 201 as an dedicated traffic channel signal.

Then, the operation of the mobile station equipped with the transmission/reception apparatus according to this embodiment will be explained with reference to FIG.6

as well as FIG.4 and FIG.5. The explanation below assumes, as shown in FIG.4, that mobile station 101 first moves from area 105 of base station (A) 102 to area 106 of base station (B) 103.

5 FIG.6A to FIG.6D are schematic diagrams showing an example of the state of time slots assigned to the mobile station equipped with the transmission/reception apparatus according to Embodiment 1 and the base stations that carry out a radio communication with this mobile
10 station.

 Suppose mobile station 101 is located in area 105 first. At this time, as shown in FIG.6A, time slot (hereinafter referred to as "TS") 301 in a frame is assigned a channel for base station (A) 102 to transmit
15 a common control channel signal to each mobile station including mobile station 101 and to transmit an dedicated traffic channel signal to mobile stations that belong to this base station (A) 102 and TS302 is assigned a channel for the mobile stations that belong to base
20 station (A) 102 to transmit an dedicated traffic channel signal to this base station (A) 102.

 The system of multiplexing dedicated traffic channel signals to each mobile station in TS301 and the system of multiplexing dedicated traffic channel signals
25 from each mobile station to base station (A) 102 in TS302, that is, the case where a CDMA system is used as the system of multiplexing signals at time slots in the frame will be explained. However, the multiplexing system is not

limited to the CDMA system.

According to FIG.6A, in TS301, base station (A) 102 transmits an dedicated traffic channel signal to each mobile station that belongs to this base station (A) 102 and mobile station 101 receives the dedicated traffic channel signal transmitted from base station (A) 102.

On the other hand, as described above, each base station (base station (A) 102 and base station (B) 103 in FIG.4) transmits a common control channel signal for every frame, that is, almost always transmits a common control channel signal. That is, base station (A) 102 transmits a common control channel signal for every frame using TS301 shown in FIG.6A and base station (B) 103 transmits a common control channel signal for every frame using any TS in the frame shown in FIG.6A. Upon receipt of a command for measuring the reception level from base station (here base station (A) 102), mobile station 101 measures the reception level of these common control channel signals and reports the reception level to the base station above.

In TS302, mobile station 101 transmits an dedicated traffic channel signal to base station (A) 102. Base station (A) 102 receives dedicated traffic channel signals from mobile stations that belong to this base station (A) 102 including mobile station 101.

Then, mobile station 101 moves toward base station (B) 103 and suppose the reception level of the common control channel signal of base station (B) 103 at mobile

station 101 exceeds the reception level of the common control channel signal of base station (A) 102.

In this case, base station (A) 102 decides whether mobile station 101 needs to perform handover to base station (B) 103 or not, and if necessary, base station (A) 102 transmits a command for starting handover to mobile station 101. In this way, handover is executed.

In execution of handover, as shown in FIG.6B, TS303 is assigned a channel for base station (B) 103 to transmit an dedicated traffic channel signal to mobile station 101. In this way, base station (B) 103 transmits an dedicated traffic channel signal to mobile station 101.

In TS303, base station (B) 103 transmits an dedicated traffic channel signal to mobile station 101 and mobile station 101 receives the dedicated traffic channel signal transmitted from base station (B) 103. That is, in execution of handover, mobile station 101 receives an dedicated traffic channel signal from base station (A) 102 and an dedicated traffic channel signal from base station (B) 103.

The operations of mobile station 101 and base station (A) 102 in TS301 and TS302 in FIG.6B are the same as those described above.

As described above, mobile station 101 measures and compares a propagation loss of each base station for every frame, that is, almost always.

Here, in the case where the propagation loss of base station (A) 102 is smaller than the propagation loss of

base station (B) 103, propagation loss comparator 207 detects base station (A) 102 as the base station whose propagation loss is a minimum.

Thus, transmission data control section 208
 5 generates a control signal indicating that an dedicated traffic channel signal should be transmitted to base station (A) 102, and therefore data composition section 209 controls the timing of transmission data so that an dedicated traffic channel signal is transmitted to base
 10 station (A) 102 and at the same time spreading section 211 performs spreading processing so that an dedicated traffic channel signal is transmitted to base station (A) 102.

As a result, as shown in FIG.6B, mobile station 101
 15 only transmits an dedicated traffic channel signal to base station (A) 102.

On the contrary, in the case where the propagation loss of base station (B) 103 is smaller than the propagation loss of base station (A) 102, propagation
 20 loss comparator 207 detects base station (B) 103 as the base station whose propagation loss is a minimum.

Thus, transmission data control section 208
 generates a control signal indicating that an dedicated traffic channel signal should be transmitted to base
 25 station (B) 103, and therefore data composition section 209 controls the timing of transmission data so that an dedicated traffic channel signal is transmitted to base station (B) 103 and at the same time spreading section

211 performs spreading processing so that an dedicated traffic channel signal is transmitted to base station (B) 103.

As a result, as shown in FIG.6C, mobile station 101 stops transmission of an dedicated traffic channel signal to base station (A) 102 and transmits an dedicated traffic channel signal only to base station (B) 103.

In this case (FIG.6C), when mobile station 101 moves to area 106 of base station (B) 103 completely, base station (A) 102 or base station (B) 103 transmits a command for handover end to mobile station 101 and stops transmission of an dedicated traffic channel signal to mobile station 101. As a result, as shown in FIG.6D, mobile station 101 only receives an dedicated traffic channel signal from base station (B) 103 and transmits an dedicated traffic channel signal only to base station (B) 103.

Then, the operation of the base station in execution of handover in the case where the mobile station equipped with the transmission/reception apparatus according to this embodiment switches the base station to which an dedicated traffic channel signal should be transmitted based on the reception level of a common control channel signal from each base station during handover will be explained with reference to FIG.4 and FIG.6 again.

According to FIG.4, after receiving an dedicated traffic channel signal from mobile station 101, base station (A) 102 and base station (B) 103 extract a

demodulated signal by performing predetermined demodulation processing on the received signal. Moreover, each base station above performs CRC processing on the demodulated signal and thereby obtains information as to whether this demodulated signal block is wrong or not, that is, a CRC result. Furthermore, the base station above outputs a signal resulting from adding the above CRC result to the extracted demodulated signal to RNC (Radio Network Controller) 104.

RNC 104 compares the CRC result added to the signal transmitted from each base station and outputs the signal from the base station in which no error has occurred to a net, which is not shown in the figure.

This will be explained more specifically with reference to FIG.6. In the case shown in FIG.6B, mobile station 101 transmits an dedicated traffic channel signal to base station (A) 102 in TS302. Base station (A) 102 extracts the demodulated signal from the received dedicated traffic channel signal and outputs a signal resulting from adding the CRC result to this demodulated signal to RNC 104. On the other hand, base station (B) 103 receives no dedicated traffic channel signal from mobile station 101, and therefore the result of CRC processing for the demodulated signal is regarded as NG. Thus, base station (B) 103 transmits a predetermined signal with the CRC result regarded as NG added to RNC 104.

RNC 104 compares the CRC result added to the signal

from base station (A) 102 and the CRC result added to the signal from base station (B) 103. Here, since the CRC result regarded as NG for the signal from base station (B) 103 is added to RNC 104, the signal from base station (A) 102 is selected by RNC 104. As a result, only the signal from base station (A) 102 is output to a net, which is not shown in the figure.

Then, in the case shown in FIG.6C, mobile station 101 changes the transmission destination of an dedicated traffic signal from base station (A) 102 to base station (B) 103 based on a propagation loss calculated from the reception level of a common control channel signal from each base station. Base station (B) 103 extracts the demodulated signal from the dedicated traffic signal received from mobile station 101 and outputs a signal resulting from adding the CRC result to this demodulated signal to RNC 104. On the other hand, since base station (A) 102 has not received an dedicated traffic channel signal from mobile station 101, the result of CRC processing to the demodulated signal is regarded as NG. For this reason, base station (B) 103 transmits a predetermined signal with the CRC result regarded as NG added to RNC 104.

RNC 104 compares CRC results added to signals from the base stations. The RNC estimates only the signal from base station (B) 103 as the signal with no error. As a result, only the signal from base station (B) 103 is output to a net, which is not shown in the figure.

As shown above, mobile station 101 switches the transmission destination of an dedicated traffic channel signal from the propagation loss calculated based on the reception level of a common control channel signal during
5 handover. RNC 104 compares the CRC results, and therefore can output an appropriate signal to the net. That is, even if each mobile station switches the transmission destination of the traffic channel during handover, each base station need not perform any special
10 processing and RNC 104 can output an appropriate signal to the net.

As shown above, the transmission/reception apparatus according to this embodiment measures a propagation loss using a common control channel signal
15 almost always transmitted from each base station (each party on the other end of communication), only transmits an dedicated traffic channel signal to the base station whose propagation loss is a minimum (base station whose propagation condition is optimal) in execution of
20 handover and stops transmission of an dedicated traffic channel signal to other base stations. This can limit the time slots for transmission of dedicated traffic channel signals of the transmission/reception apparatus above to only one time slot, making it possible to
25 suppress current consumption of the transmission/reception apparatus above and suppress interference with base stations other than those using the same time slot as that described above which is a

communication target.

Furthermore, the transmission/reception apparatus according to this embodiment uses channels handled by a plurality of base stations during handover to receive
5 dedicated traffic channel signals and uses channels handled by the base station whose propagation loss is a minimum to transmit an dedicated traffic channel signal, making it possible to suppress interruption of calls more than the case where conventional hard handover is used.

10 Furthermore, the transmission/reception apparatus according to this embodiment uses a TDD system for a communication with each base station. The TDD system provides a very high correlation between the uplink propagation path characteristic and downlink

15 propagation path characteristic, resulting in a high correlation between the propagation condition when a base station transmits a common control channel to this transmission/reception apparatus and the propagation condition when this transmission/reception apparatus
20 transmits an dedicated traffic channel signal to the base station above. Therefore, this transmission/reception apparatus only transmits an dedicated traffic channel signal to the base station whose propagation loss is a minimum during handover and thereby makes it possible
25 to only transmit an dedicated traffic channel signal to the optimal base station, which takes account of instantaneous variations of the propagation condition from all base stations.

This embodiment describes the case where a common control channel signal is used to select the best transmission destination of an dedicated traffic channel signal, that is, the case where a common control channel signal is adopted as a signal to measure a propagation loss. However, the present invention is not limited to this, but it is also applicable to a case where other signals transmitted with constant power by each base station are used.

10 Furthermore, even in the case of the signal transmitted with intrinsic power by each base station to each mobile station equipped with the transmission/reception apparatus according to this embodiment, if that signal is a signal that the mobile station can estimate intrinsic power for each base station and estimate its propagation loss, the present invention is also applicable to a case using that signal to select the transmission destination of the optimal dedicated traffic channel signal.

20 For example, each base station may perform transmit power control specific to each mobile station for an dedicated traffic channel signal. Thus, it is impossible for each base station to simply select an optimal transmission destination of the dedicated traffic channel signal from the reception level of the dedicated traffic channel signal from each base station. However, the mobile station can estimate the propagation loss of an dedicated traffic channel signal for each base

station if it is possible to estimate the transmission level of the dedicated traffic channel signal at each base station (method of using a command used for closed-loop transmit power control, etc.) in addition to the reception level of the dedicated traffic channel signal sent from each base station. In such a case, each mobile station can, therefore, decide the optimal transmission destination of an dedicated traffic channel signal (transmission destination with an optimal propagation condition) using an dedicated traffic channel signal from each base station.

Furthermore, this embodiment describes the case where only a CDMA system is used as the method of multiplexing signals at time slots in a frame, but the present invention is also applicable to a case where an OFDM system is used in addition to a CDMA system.

Furthermore, this embodiment describes the case where two base stations are involved in handover, but the present invention is not limited to this and is also applicable to cases where three or more base stations are involved in handover. In this case, it is possible to select a base station to which an dedicated traffic channel signal should be transmitted based on the propagation condition for each base station (e.g., propagation loss calculated from the reception level of a common control channel signal from each base station). It is also possible to select one base station as the base station to which an dedicated traffic channel signal

should be transmitted and it is also possible to select two or more base stations according to the reception level of the common control channel signal.

5 (Embodiment 2)

This embodiment describes a case of Embodiment 1 where in execution of handover, an dedicated traffic channel signal is transmitted with a transmit power value determined with an open loop to a base station whose
10 propagation loss calculated using a common control channel signal is a minimum.

Hereinafter, the transmission/reception apparatus according to this embodiment will be explained with reference to FIG.7 taking the case where this
15 transmission/reception apparatus is mounted in a mobile station as an example. FIG.7 is a block diagram showing a configuration of a mobile station equipped with the transmission/reception apparatus according to Embodiment 2. The parts in FIG.7 with the same
20 configuration as that in Embodiment 1 (FIG.5) are assigned the same reference numerals as those in FIG.5 and their detailed explanations will be omitted. Only differences in FIG.7 from Embodiment 1 (FIG.5) will be focused and explained below.

25 According to FIG.7, the control signal explained in Embodiment 1 is input to transmit power control section 401. That is, in execution of handover, a control signal indicating that an dedicated traffic

channel signal should be transmitted to the base station whose propagation loss is a minimum is input to transmit power control section 401 and during a normal communication, a control signal indicating that an
5 dedicated traffic channel signal should be transmitted to the base station which has been considered to be the transmission destination of an dedicated traffic channel signal so far is input. A propagation loss of each base station is input from propagation loss measuring section
10 206 to transmit power control section 401.

An optimal transmit power value is set to transmit power control section 401 with an open loop based on the propagation loss corresponding to the base station whose propagation loss is a minimum transmitted from
15 propagation loss measuring section 206 for an dedicated traffic channel to the base station above not only during a normal communication but also during handover. That is, in the case, for example, where the propagation loss of the base station from propagation loss measuring
20 section 206 is small, a small transmit power value of the dedicated traffic channel signal is set to the base station above and in the case where the propagation loss above is large, a large transmit power value is set. Information on the transmit power value is output to RF
25 section 402.

During handover, RF section 402 only transmits an dedicated traffic channel signal to the base station whose propagation loss is a minimum with a transmit power

value set based on the information above from transmit power control section 401.

Thus, the transmission/reception apparatus according to this embodiment measures a propagation loss using a common control channel signal almost always transmitted from each base station and transmits, in execution of handover, an dedicated traffic channel signal using a transmit power value set with an open loop based on the propagation loss above only to the base station whose propagation loss is a minimum and stops transmission of an dedicated traffic channel signal to other base stations.

Because of this, it is possible to limit time slots for transmission of an dedicated traffic channel signal of the transmission/reception apparatus above to one time slot, thus reducing current consumption of the transmission/reception apparatus above. Moreover, the transmission/reception apparatus according to this embodiment transmits an dedicated traffic channel signal with an appropriate transmit power value according to the propagation condition, thus making it possible to transmit an dedicated traffic channel signal with an appropriate transmit power value to an appropriate base station.

This embodiment describes the case where two base stations are involved in handover, but the present invention is not limited to this and is also applicable to cases where three or more base stations are involved

in handover. In this case, it is possible to select a base station to which an dedicated traffic channel signal should be transmitted based on the propagation condition for each base station (e.g., propagation loss measured using a common control channel signal from each base station) and set a transmit power value of the dedicated traffic channel signal to the selected base station based on the propagation condition for the base station above. It is also possible to select one base station as the base station to which an dedicated traffic channel signal should be transmitted and it is also possible to select two or more base stations according to the reception level of a common control channel signal.

Furthermore, this embodiment describes the case where a common control channel signal is used as a signal to measure the propagation condition, but the present invention is not limited to this, and is also applicable to cases where another signal, for example, an dedicated traffic channel signal is used. In the case where an dedicated traffic channel signal is used as the signal to measure the propagation condition, it is possible to select a party on the other end of communication to which the dedicated traffic channel signal should be transmitted using the method explained in Embodiment 1 and transmit the dedicated traffic channel signal with a transmit power value set with an open loop using a propagation loss calculated from the transmission level of the dedicated traffic channel signal at this base

station and the reception level in the transmission/reception apparatus according to this embodiment about this dedicated traffic channel signal to the selected base station. This makes it possible to
5 transmit an dedicated traffic channel signal with an optimal power value to each base station.

The transmission/reception apparatus according to this invention can be mounted in a communication terminal apparatus in a digital radio communication system.

10

① The TDMA-TDD based transmission/reception apparatus of the present invention adopts a configuration comprising

detector for detecting propagation conditions for
15 a plurality of base stations which receive an dedicated traffic channel signal;

selector for selecting the base station with an optimal propagation condition from among the plurality of base stations as the transmission destination of the
20 dedicated traffic channel signal; and

transmitter for transmitting the dedicated traffic channel signal only to the base station selected by said selector.

According to this configuration, the propagation
25 conditions for a plurality of parties on the other end of communication which receive an dedicated traffic channel signal are detected and the dedicated traffic channel signal is only transmitted to the one from among

the plurality of parties on the other end of communication whose propagation condition is optimal, thus making it possible to suppress current consumption and interference with parties on the other end of communication other than the communication target.

② The TDMA-TDD based transmission/reception apparatus of the present invention adopts a configuration with the detector detecting propagation conditions using the transmission level of common control channel signals by a plurality of base stations and the reception level of common control channel signals transmitted by the plurality of base stations.

According to this configuration, the common control channel signal is transmitted with constant power by a plurality of parties on the other end of communication, and therefore it is possible to accurately detect the propagation conditions for the plurality of parties on the other end of communication above from the transmission level of the broadcast common control channel signal above by measuring the reception level of the common channel signal above. This makes it possible to reliably transmit an dedicated traffic channel signal only to a party on the other end of communication with an optimal propagation condition.

③ The TDMA-TDD based transmission/reception apparatus of the present invention adopts a configuration with the detector detecting propagation conditions using the transmission level of dedicated

traffic channel signals from a plurality of base stations and the reception level of dedicated traffic channel signals transmitted by the plurality of base stations.

According to this configuration, it is possible to
5 correctly detect the propagation conditions for a plurality of parties on the other end of communication above by using the transmission level of the dedicated traffic channel signals at the plurality of parties on the other end of communication above and the reception
10 level of dedicated traffic channel signals transmitted from the plurality of parties on the other end of communication above. This makes it possible to reliably transmit an dedicated traffic channel signal only to a party on the other end of communication with an optimal
15 propagation condition.

④ The TDMA-TDD based transmission/reception apparatus of the present invention adopts a configuration with the transmitter transmitting an dedicated traffic channel signal with a transmit power
20 value set with an open loop using the propagation condition from each base station to the base station selected by the selector.

According to this configuration, an dedicated traffic channel signal is transmitted with a transmit
25 power value set with an open loop according to the propagation condition above to the party on the other end of communication selected as the transmission destination of the dedicated traffic channel assuming

that its propagation condition is optimal, making it possible to transmit an dedicated traffic channel signal with an appropriate transmit power value to an appropriate party on the other end of communication.

- 5 ⑤ The communication terminal apparatus of the present invention adopts a configuration comprising the TDMA-TDD based transmission/reception apparatus above.

 According to this configuration, it is possible to provide a communication terminal apparatus carrying out
10 optimal communications by mounting a transmission/reception apparatus capable of suppressing current consumption and interference with parties on the other end of communication other than the communication target and executing handover without causing any
15 interruption of calls.

- ⑥ The base station of the present invention adopts a configuration carrying out a radio communication with a communication terminal apparatus equipped with the TDMA-TDD based transmission/reception apparatus above.

20 According to this configuration, it is possible to provide a base station carrying out optimal communications by carrying out a radio communication with a communication terminal apparatus equipped with a transmission/reception apparatus capable of
25 suppressing current consumption and interference with parties on the other end of communication other than the communication target and executing handover without causing any interruption of calls.

⑦ The TDMA-TDD based transmission/reception method of the present invention comprises

detecting step of detecting propagation conditions for a plurality of base stations which receive an
5 dedicated traffic channel signal;

selecting step of selecting the base station with an optimal propagation condition from among the plurality of base stations as the transmission destination of the dedicated traffic channel signal; and

10 transmitting step of transmitting the dedicated traffic channel signal only to the base station selected by said selecting step.

According to this method, the propagation conditions for a plurality of parties on the other end
15 of communication which receive an dedicated traffic channel signal is detected and the dedicated traffic channel signal is only transmitted to the party on the other end of communication whose propagation condition is optimal, thus making it possible to suppress current
20 consumption and interference with parties on the other end of communication other than the communication target.

As described above, the present invention selects the base station to be the transmission destination from
25 among a plurality of base stations in the process of handover based on the propagation conditions for the plurality of base stations and transmits a signal only to the selected base station, thus making it possible

to provide a transmission/reception apparatus capable
of suppressing current consumption and interference with
base stations other than the communication target and
executing handover without causing any interruption of
5 calls.

The present invention is not limited to the above
described embodiments, and various variations and
modifications may be possible without departing from the
10 scope of the present invention.

This application is based on the Japanese Patent
Application No.HEI 11-309229 filed on October 29, 1999,
entire content of which is expressly incorporated by
15 reference herein.

What is claimed is:

1. A TDMA-TDD based transmission/reception apparatus comprising:

5 detector for detecting propagation conditions for a plurality of base stations which receive an dedicated traffic channel signal;

 selector for selecting the base station with an optimal propagation condition from among the plurality
10 of base stations as the transmission destination of the dedicated traffic channel signal; and

 transmitter for transmitting the dedicated traffic channel signal only to the base station selected by said selector.

15

2. The TDMA-TDD based transmission/reception apparatus according to claim 1, wherein the detector detects propagation conditions using the transmission level of common control channel signals by a plurality of base
20 stations and the reception level of common control channel signals transmitted by the plurality of base stations.

3. The TDMA-TDD based transmission/reception apparatus
25 according to claim 1, wherein the detector detects propagation conditions using the transmission level of dedicated traffic channel signals from a plurality of base stations and the reception level of dedicated

traffic channel signals transmitted by the plurality of base stations.

4. The TDMA-TDD based transmission/reception apparatus according to claim 1, wherein the transmitter transmits an dedicated traffic channel signal with a transmit power value set with an open loop using the propagation condition from each base station to the base station selected by the selector.

5. A communication terminal apparatus equipped with a TDMA-TDD based transmission/reception apparatus, said TDMA-TDD based transmission/reception apparatus comprising:

15 detector for detecting propagation conditions for a plurality of base stations which receive an dedicated traffic channel signal;

20 selector for selecting the base station with an optimal propagation condition from among the plurality of base stations as the transmission destination of the dedicated traffic channel signal; and

 transmitter for transmitting the dedicated traffic channel signal only to the base station selected by said selector.

25 6. A base station that carries out a radio communication with a communication terminal apparatus equipped with a TDMA-TDD based transmission/reception apparatus, said

TDMA-TDD based transmission/reception apparatus
comprising:

detector for detecting propagation conditions for
a plurality of base stations which receive an dedicated
5 traffic channel signal;

selector for selecting the base station with an
optimal propagation condition from among the plurality
of base stations as the transmission destination of the
dedicated traffic channel signal; and

10 transmitter for transmitting the dedicated traffic
channel signal only to the base station selected by said
selector.

7. A TDMA-TDD based transmission/reception method
15 comprising:

detecting step of detecting propagation conditions
for a plurality of base stations which receive an
dedicated traffic channel signal;


selecting step of selecting the base station with
20 an optimal propagation condition from among the
plurality of base stations as the transmission
destination of the dedicated traffic channel signal; and

transmitting step of transmitting the dedicated
traffic channel signal only to the base station selected
25 by said selecting step.

ABSTRACT OF THE DISCLOSURE

Despreading section 203 extracts a common control channel signal from each base station by performing
5 despreading processing on a baseband signal from RF section 202 using a predetermined spreading code. Propagation loss measuring section 206 measures a propagation loss for each base station using the reception level of the common control channel signal and
10 the transmission level of this common control channel signal. Propagation loss comparator 207 detects a base station whose propagation loss is a minimum from among all base stations. Transmission data control section 208 controls the timing of transmission data in the data
15 composition section so that an dedicated traffic channel signal is transmitted to the detected base station and controls the spreading code in spreading section 211.

FIG. 1 is a schematic diagram of a mobile communication system in accordance with the present invention. The system includes a mobile station 11, a base station (A) 12, and a base station (B) 13. The mobile station 11 is shown with two arrows indicating its movement. The base station (A) 12 and base station (B) 13 are shown with antennas 12 and 13, respectively. The mobile station 11 is connected to both base stations 12 and 13 via a network 14.

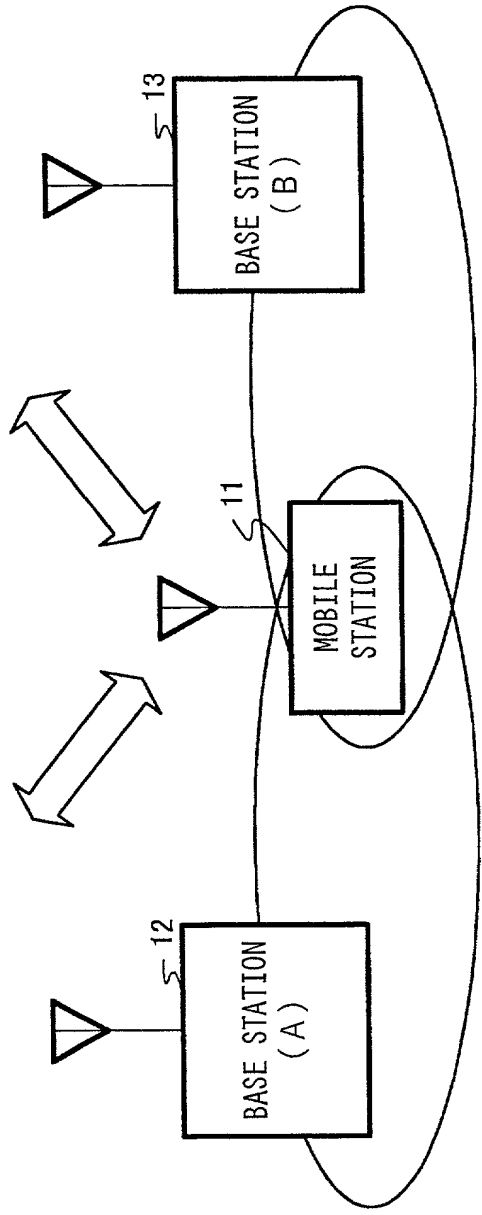

PRIOR ART

FIG.1

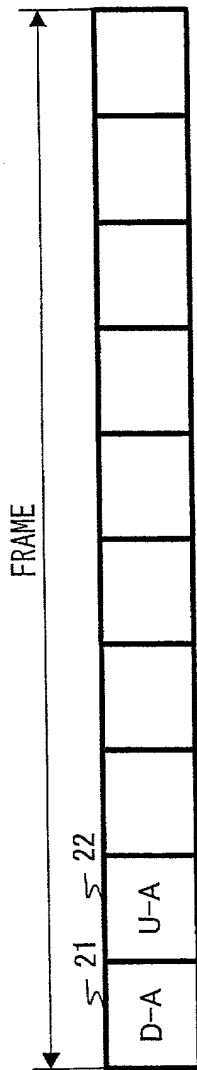


FIG. 2A

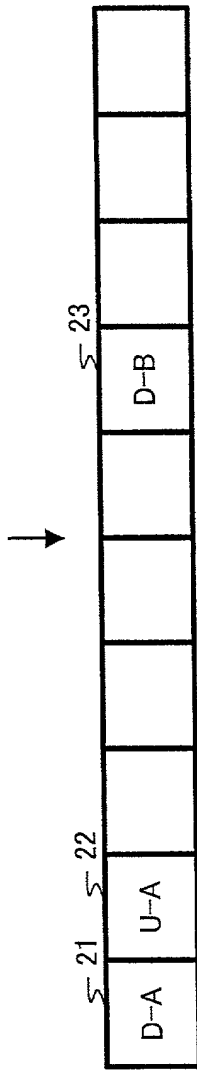


FIG. 2B

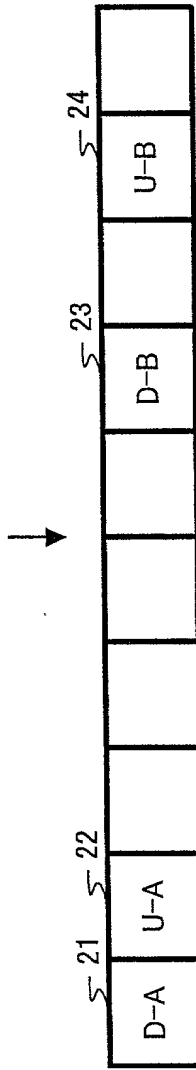


FIG. 2C

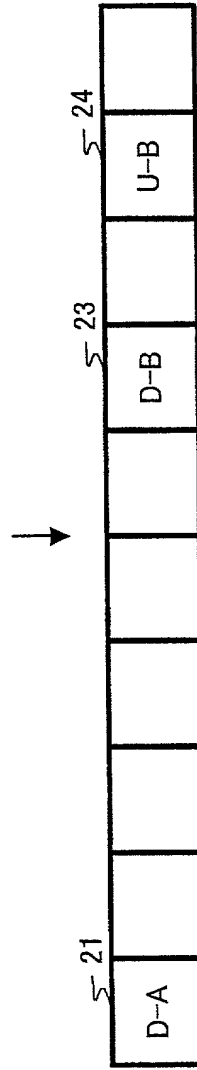


FIG. 2D

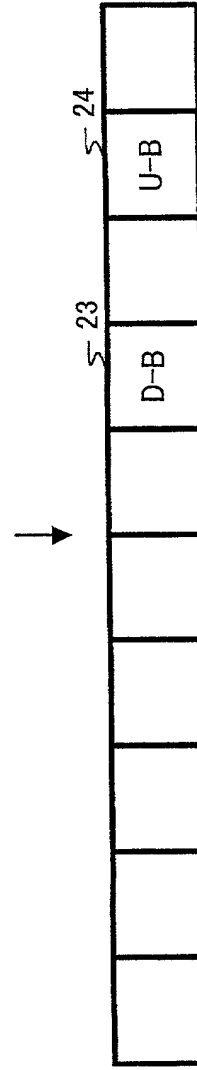


FIG. 2E

PRIOR ART

FIG. 3A and FIG. 3B are schematic diagrams of a frame structure in accordance with the present invention.

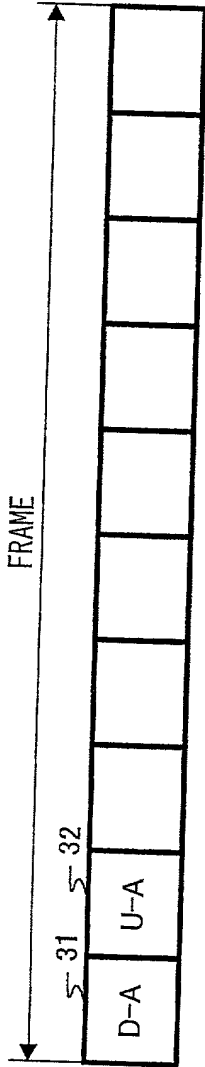


FIG. 3A

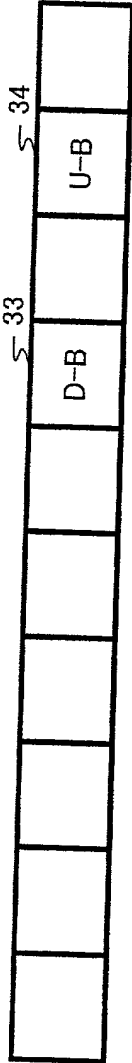


FIG. 3B

PRIOR ART

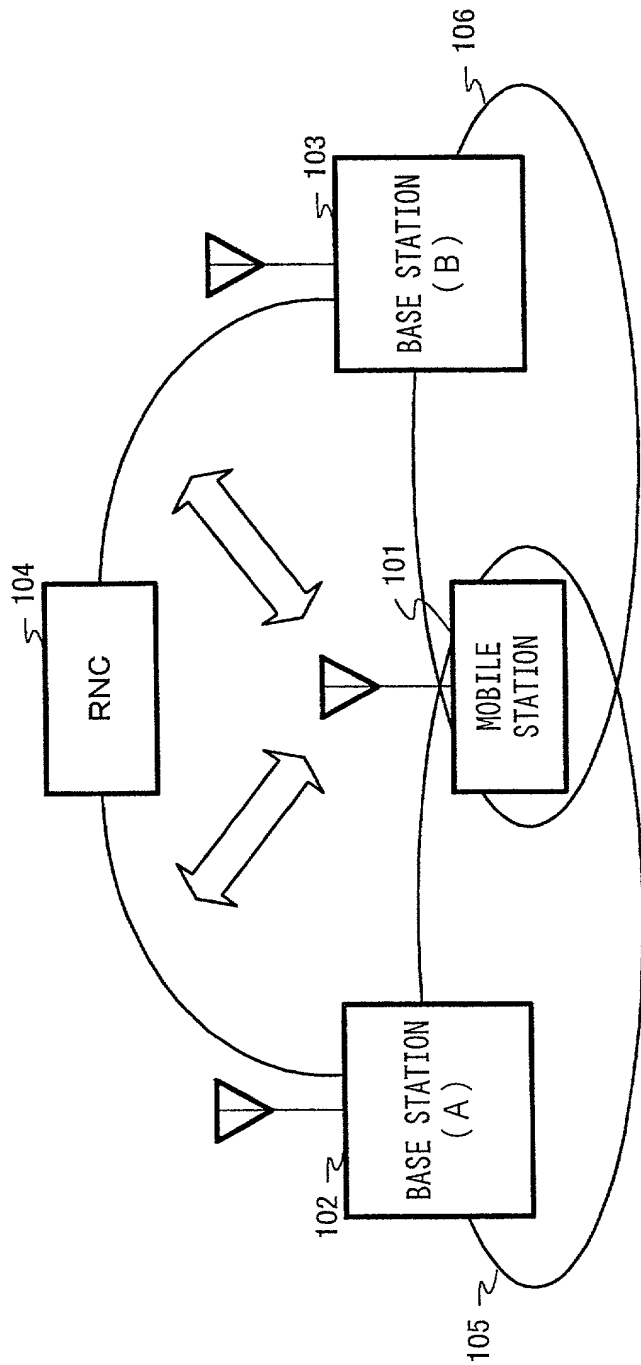


FIG.4

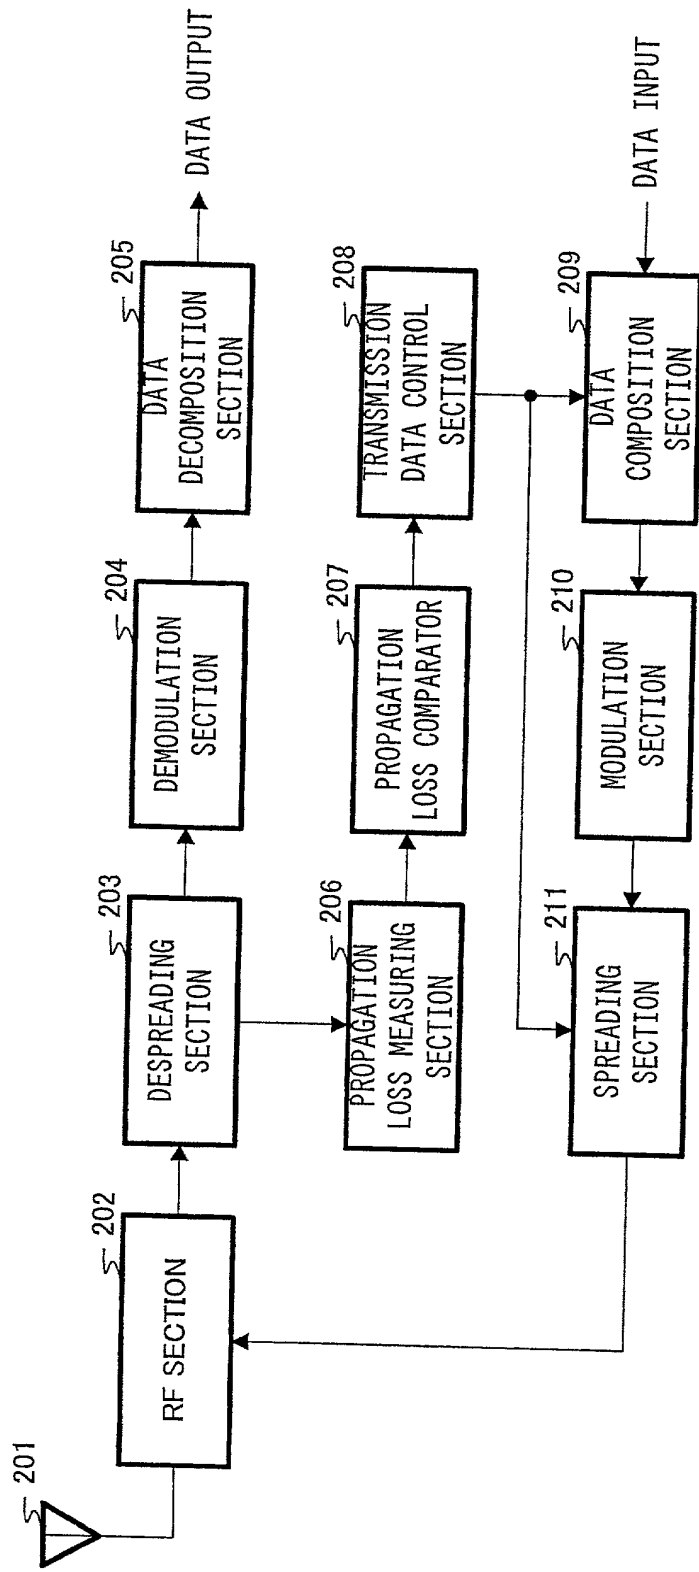


FIG.5

FIG. 6A

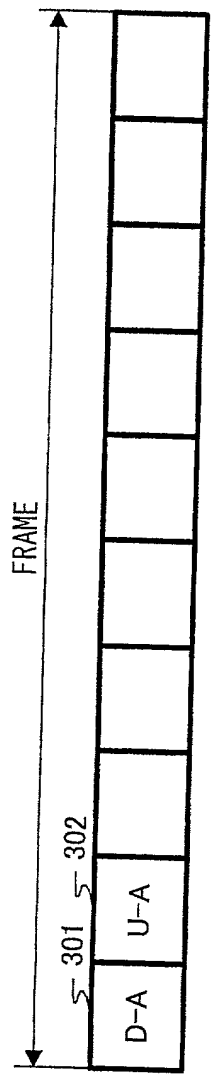


FIG. 6A

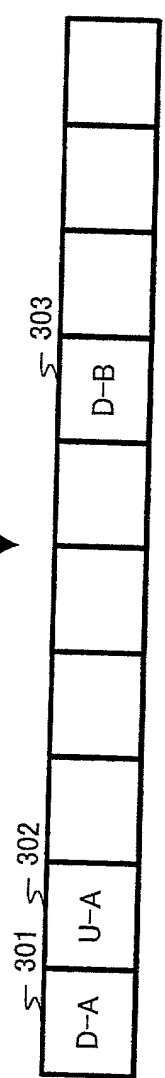


FIG. 6B

HANDOVER
IN
PROGRESS

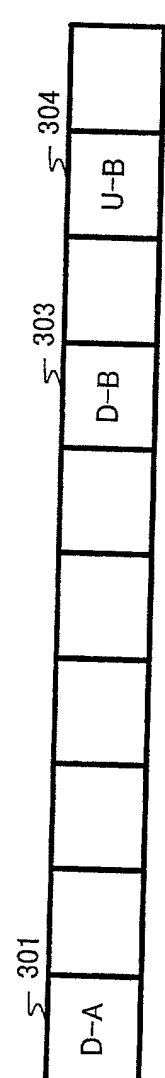


FIG. 6C

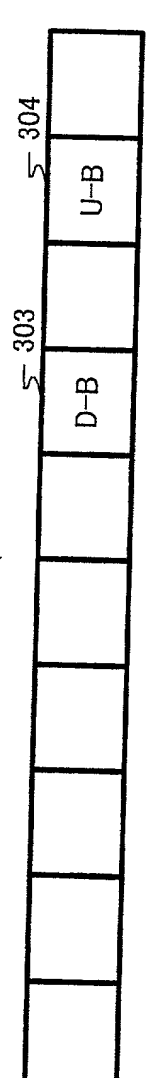


FIG. 6D

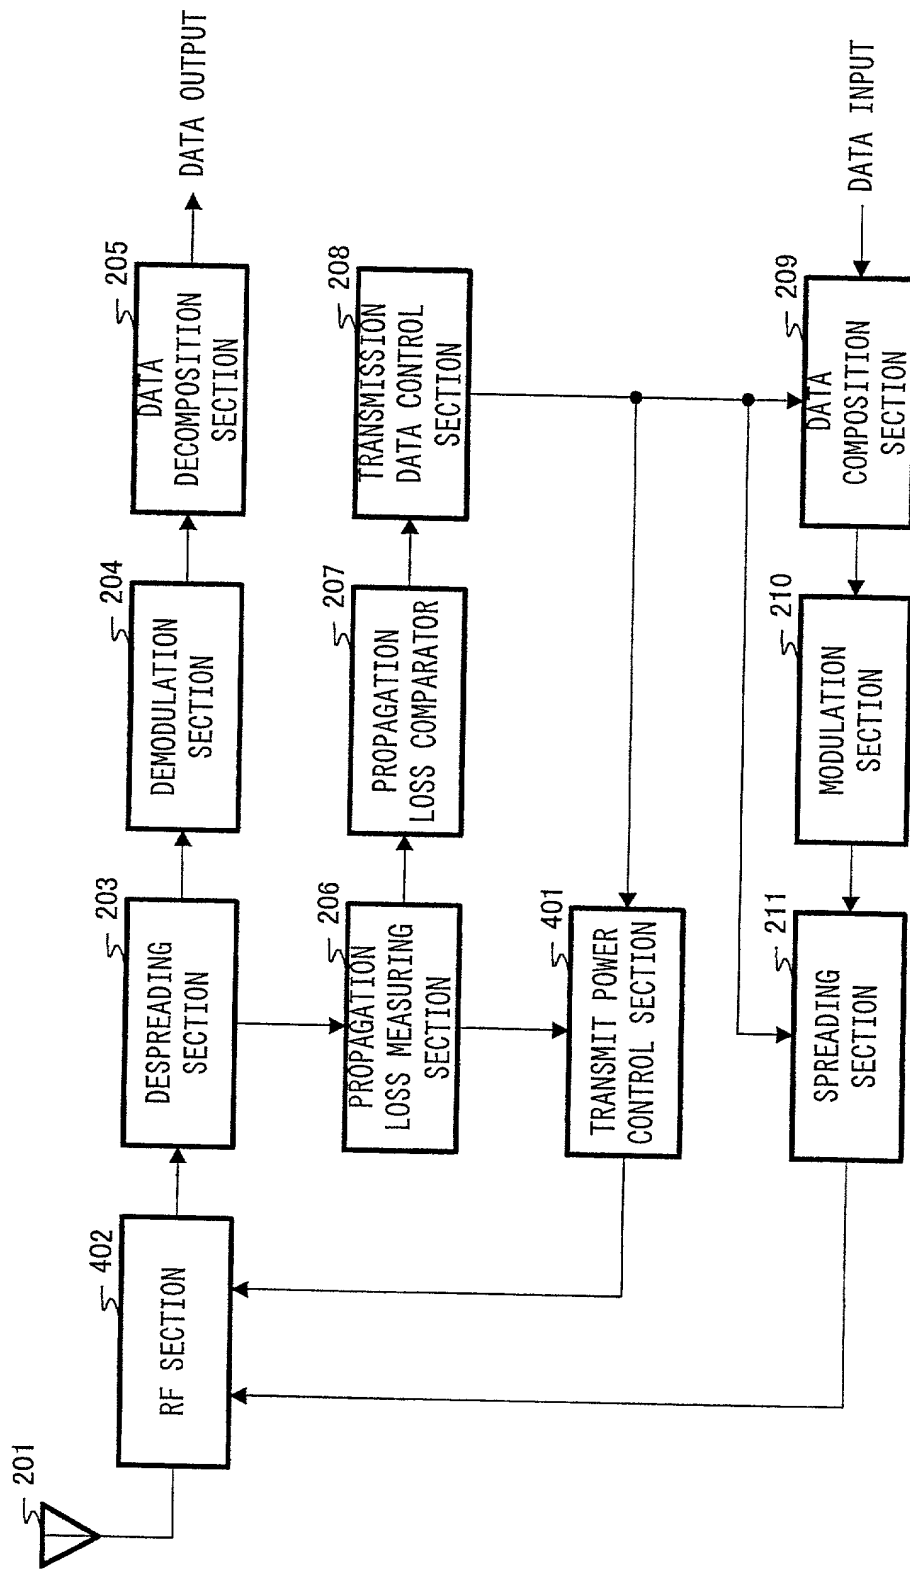


FIG.7

APPLICATION FOR UNITED STATES PATENT
Declaration for Patent Application

As a below named inventor, I hereby declare that:

My residence, post office address and citizenship are as stated below next to my name.

I believe I am the original, first and sole inventor (if only one name is listed below) or an original, first and joint inventor (if plural names are listed below) of the subject matter which is claimed and for which a patent is sought on

the invention entitled: APPARATUS AND METHOD FOR TDMA-TDD BASED TRANSMISSION/RECEPTION

the specification of which 2 (file no _____)

(check at least one) 3 ☒ is attached hereto
4 ☐ was filed on _____ as (5) U.S. Application Serial No. _____
6 ☐ and was amended _____
(if applicable)

Use this portion only if you are entering the U.S. National phase based on a PCT International Application designating the U.S.	7 <input type="checkbox"/>	was filed as PCT international application
	8	Number _____
	9	on _____
	and was amended under PCT Article(s) 19 and/or 34	
10	on _____	(if applicable).

I hereby declare that I have reviewed and understand the contents of the above-identified specification, including the claims, as amended, by any amendment referred to above.

I acknowledge the duty to disclose to the United States Patent and Trademark Office all information known to me which is material to patentability in accordance with Title 37, Code of Federal Regulations, §1.56.

I hereby claim foreign priority benefits under Title 35, United States Code, §119 of any foreign application(s) for patent or inventor's certificate listed below and have also identified below any foreign application(s) for patent or inventor's certificate or any PCT international application(s) designating at least one country other than the United States of America filed by me on the same subject matter having a filing date earlier than that of the application(s) on which priority is claimed.

Prior (Foreign) Application(s) any Priority Claims Under 35 U.S.C. 119			Priority Claimed	
11a	<u>JAPAN</u> (Country)	<u>H11-309229</u> (Number)	<u>29/October/1999</u> (Day/Month/Year Filed)	<input checked="" type="checkbox"/> Yes <input type="checkbox"/> No
	_____ (Country)	_____ (Number)	_____ (Day/Month/Year Filed)	<input type="checkbox"/> Yes <input type="checkbox"/> No
<input type="checkbox"/> Additional foreign application numbers are listed on a supplemental priority data sheet attached hereto.				

Priority Claim(s) from U.S. Provisional Application(s) – I hereby claim the benefit under Title 35, United States Code, §119(c) of any United States provisional application(s) listed below:

11b	Application No.	Day/Month/Year Filed	Application No.	Day/Month/Year Filed
-----	-----------------	----------------------	-----------------	----------------------

Do not use this portion to identify a PCT application if the parent application is the U.S. National phase of the PCT application	I hereby claim the benefit under Title 35, United States Code, 120 of any United States application(s) or PCT international application(s) designating the United States of America that is/are listed below and, insofar as the subject matter of each of the claims of this application is not disclosed in that/those prior application(s) in the manner provided by the first paragraph of Title 35, United States Code §112, I acknowledge the duty to disclose to the United States Patent and Trademark Office all information known to me to be material to patentability as defined in Title 37, Code of Federal Regulations, §1.56 which became available between filing date of the prior application and the national or PCT international filing date of this application.		
	13 _____ (U.S. Application Number)	_____ (U.S. Filing Date)	_____ Status (patented, pending, abandoned)

I hereby appoint the following attorneys of the firm of Stevens, Davis, Miller & Mosher, L.L.P. as my attorneys of record with full power of substitution and revocation to prosecute this application and to transact all business in the Patent and Trademark Office:

James E. Ledbetter, Reg. No. 28732; Thomas P. Pavelko, Reg. No. 31689; and Anthony P. Venturino, Reg. No. 31674.

**ALL CORRESPONDENCE IN CONNECTION WITH THIS APPLICATION SHOULD BE SENT TO
STEVENS, DAVIS, MILLER & MOSHER, L.L.P., 1615 L Street, N.W., Suite 850, Washington, D.C. 20036,
TELEPHONE (202) 408-5100, FACSIMILE (202) 408-5200.**

See page 2 for signature lines

STEVENS, DAVIS, MILLER & MOSHER, L.L.P.

I hereby declare that all statements made herein of my own knowledge are true and that all statements made on information and belief are believed to be true; and further that these statements were made with the knowledge that willful false statements and the like so made are punishable by fine or imprisonment, or both, under Section 1001 of Title 18 of the United States Code, and that such willful statements may jeopardize the validity of the application or any patent issuing thereon.

PAGE 2 OF U.S.A. DECLARATION FORM

13a	Typewritten Full Name of Sole or First Inventor	Takashi		KITADE
		Given Name	Middle Name	Family Name
14a	Inventor's Signature	<i>Takashi</i>		<i>Kitade</i>
15a	Date of Signature	<i>October</i>	<i>10</i>	<i>2000</i>
		Month	Day	Year
16a	Residence	Yokosuka-shi	Kanagawa	JAPAN
		City	State or Province	Country
17a	Citizenship	JAPAN		
18a	Post Office Address (Insert complete mailing address, including country)	2-903 Heim Hikari no Oka, 6-2, Hikari no Oka, Yokosuka-shi, Kanagawa 239-0847 JAPAN		
13b	Typewritten Full Name of Sole or First Inventor			
		Given Name	Middle Name	Family Name
14b	Inventor's Signature			
15b	Date of Signature			
		Month	Day	Year
16b	Residence			
		City	State or Province	Country
17b	Citizenship			
18b	Post Office Address (Insert complete mailing address, including country)			
13c	Typewritten Full Name of Sole or First Inventor			
		Given Name	Middle Name	Family Name
14c	Inventor's Signature			
15c	Date of Signature			
		Month	Day	Year
16c	Residence			
		City	State or Province	Country
17c	Citizenship			
18c	Post Office Address (Insert complete mailing address, including country)			
13d	Typewritten Full Name of Sole or First Inventor			
		Given Name	Middle Name	Family Name
14d	Inventor's Signature			
15d	Date of Signature			
		Month	Day	Year
16d	Residence			
		City	State or Province	Country
17d	Citizenship			
18d	Post Office Address (Insert complete mailing address, including country)			

*Note to Inventor: Please sign name on line 15 exactly as it appears in line 14 and insert the actual date of signing on line 16. If there are more than four inventors, please add a copy of this page for identification and signatures for the additional inventors.